

CANedge2

2xCAN/LIN Data Logger (SD + RTC + WiFi)



PLUG & PLAY: Log data out-the-box. Standalone. Power via CAN connector



SECURE WIFI: Push data via WiFi to your own server. Enterprise-grade security



PRO SPECS: Extractable 8-32 GB SD. 2xCAN/LIN. CAN FD. Zero data loss. 50 µs RTC



MANAGE FLEET: Easily update config/FW over-the-air across fleet. Auto-sync RTC via WiFi



COMPACT: Only 8 x 5 x 2 CM. 100G. Alu enclosure. 5 LEDs. Configure CH2 5V power out



INTEROPERABLE: Convert MDF4 to e.g. CSV, ASC, TRC. Free open source GUI/API

The plug & play 2xCAN/LIN logger records timestamped CAN data (Classical/CAN FD) to the extractable 8 GB industrial SD card.

The small device connects via WiFi access points (e.g. WLAN or 3G/4G routers) to securely push data to your server. Further, the device can be updated over-the-air.

The CANedge2 is ideal for telematics & fleet management - as well as R&D field tests, diagnostics and predictive maintenance.

Software/APIs are free & open source - with no fees or lock-in.

Pro specs CAN logger - at half the cost

The CANedge2 combines innovative design, cutting-edge components - and incredibly low costs:

- Dual high speed CAN/LIN (incl. CAN FD) channels
- Extractable 8-32 GB industrial SD card (months of data)
- Binary MDF4 log file format (extensive tool support)
- Advanced message filtering & transmit functionality
- Start/stop logging triggers based on CAN ID & databytes
- Silent mode, bit rate auto-detection, cyclic logging
- Data compression & encryption (e.g. for GDPR, CCPA)
- Fast boot time. Safely disconnect during use



Open source software/API - naturally

All software/APIs for the CANedge is 100% free and open source.

Data is stored in the popular MDF4 standard to enable interoperability across CAN tools and custom systems.

Convert: Simple [MDF4 converters](#) let you convert data to e.g. CSV, ASC (Vector), TRC (PEAK) - for use in your favorite tools.

Process: The [asammdf GUI](#) lets you process your data incl. DBC conversion (J1939, OBD2, ...) and graphical plots (Windows/Linux).

Automate: Easy-to-use Python APIs let you automate processing of large amounts of data (incl. quickstart library on [github](#)).

Technical specs

GENERAL

Safety	CE, FCC, IC certified
Voltage tests	Transients ISO 7637-2:2011 by TÜV SÜD
Warranty	1-year warranty
Support	Free, fast & high quality support
Origin	Denmark
Software	100% free & open source
Documentation	Online/PDF documentation

CAN BUS/LIN BUS


Channels	2 x CAN/CAN FD + 2 x LIN 2.0 (slaves)
Protocols	J1939, OBD2, CANopen, NMEA2000, FD, ...
Bit-rate	Auto-detect/simple/advanced customization

DATA LOGGING

SD CARD	8-32 GB extractable industrial micro SDHC
Real-Time Clock	50 us resolution (incl. battery backup)
File format	MDF4 (.MF4) - easily process/convert
Safety	100% power safe
Configuration	Advanced configuration options


MECHANICAL/SUPPLY

Connectors	2 x DB9 (adapter cables available)
Input supply	+7V to +32V DC via Channel 1 DB9
Consumption	<1W
Dimensions	52.5 x 81.4 x 24.5 mm (L x W x H) ex ant.
Weight	100 G
LEDs	5 external LEDs (PWR, CH1, CH2, MEM, WFI)
Temperature	-25 degC to +75 degC
IP rating	IP40

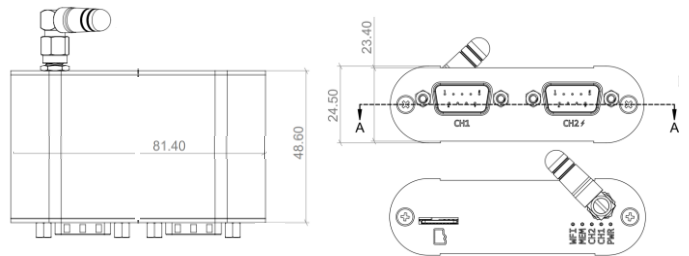

Trusted by engineers at leading OEMs



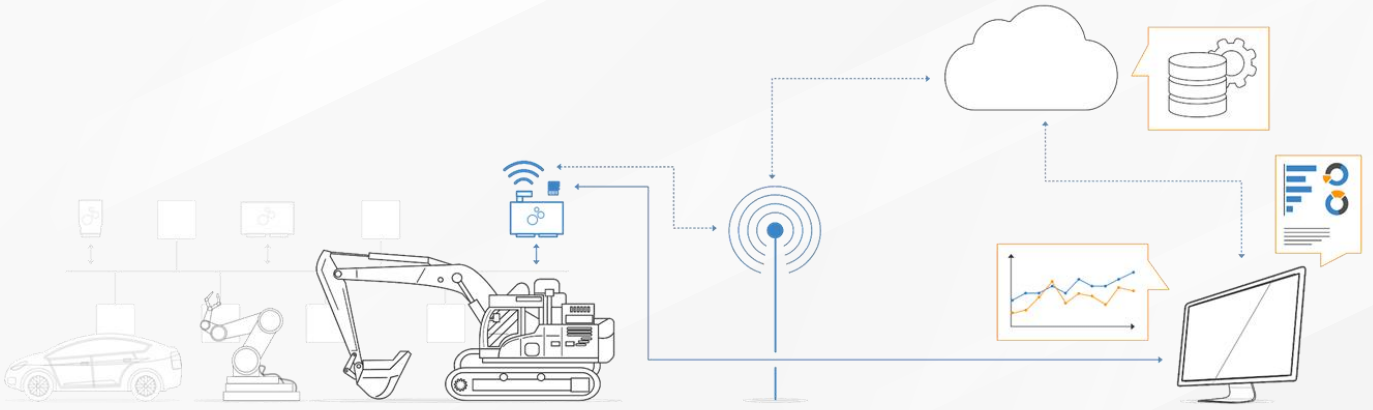


Reinventing telematics

Today, fleet telematics is vital across vehicles and machines.

However, end users face challenges: Expensive subscriptions. No data ownership. Security concerns. Vendor lock-in.

The CANedge2 provides a modern alternative:

- Upload data to your own local/dedicated/cloud server
- Add WiFi access point & server details to the config
- Log data to the SD. Auto-upload when connected to WiFi
- Configure file splits to control upload frequency
- 100% secure: HTTPS, credential encryption and more
- Manage via over-the-air updates (FW & config)
- Power 3G/4G access point or GPS via 2nd port 'power out'
- Zero fees. Zero lock-in. Interoperable. Open source tools

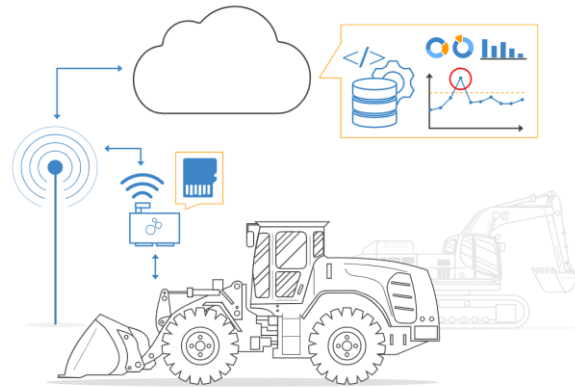

Easily manage data/devices on your server

The CANedge2 uploads data to an S3 server - which makes it easy to manage your server files via any S3-compatible tools or SDKs.

Further, the 100% optional [CANcloud](#) tool lets you manage your S3 server devices & data via your browser:

- Host yourself - or simply log into your server via our link
- Monitor device status across your fleet via dashboard
- Browse, download, share & delete uploaded log files
- Easily update config/firmware over-the-air
- Browser based (works on all OS & devices)
- 100% free and open source - easy to customize

Technical specs (WiFi/server)

WIFI

Transfer modes	Auto-push data to server from SD
Protocol	HTTP/HTTPS for fast, secure transfer
Access Points	Add 1-5 WiFi prioritized access points
Over-The-Air	Configurable OTA firmware/config updates
WiFi Heartbeat	Device optionally sends periodic status
LAN Standard	IEEE 802.11 b / g / n
Antenna	External (SMA, 2400 Mhz, <2 dBi gain)
Server Interface	S3 REST - Use with MinIO, AWS, Azure, ...

SECURITY

HTTPS	Data + OTA updates optionally via TLS 1.2
WPA/WPA2	Supports WPA/WPA2
Credentials	Optionally encrypt WiFi/S3 passwords
Firmware	All firmware updates are digitally signed
User Access	Manage user access via S3 policies



The CANedge2 can also connect to a 3G/4G USB router to upload on-the-road. The hotspot can optionally be powered via the device



The CANcloud status dashboard lets you monitor device data upload and their status (SD %left, firmware version, config status)

Trusted by engineers at leading OEMs

